

30W2F Series

30W single output
with constant voltage circuit




- **Constant voltage design(C.V. mode)**
- **AC Input voltage 160-277V**
- **Protections:**
Overload/Over voltage /Short circuit
- **IP62 design for indoor installations**
- **100% full load burn-in test**
- **Suitable for LED lighting and moving sign applications**
- **Plastic case**
- **Safety standards : EN61347-1,EN61347-2-13 /K61347-1,K61347-2-13**
- **EMC standards : EN55015,EN61547, EN61000-3-2,3/K00015,K61547**
- **3years warranty**


IP62

ITEM		UP30S12W2F
INPUT	VOLTAGE RANGE	AC160~277V
	FREQUENCY RANGE	47~63Hz
	EFFICIENCY(typ.)	83%
	AC CURRENT(typ.)	0.26A/230VAC
	INRUSH CURRENT(typ.)	COLD START 70A/230VAC
OUTPUT	DC VOLTAGE	12V
	RATED CURRENT	2.5A(1.87A@50°C)
	RATED POWER	30W
	RIPPLE&NOISE(max.) Note2	220mVp-p
	VOLTAGE TOLERANCE Note3	±3%
	LINE REGULATION Note4	±1%
	LOAD REGULATION Note5	±2%
	SETUP,RISE TIME(max.)	3000ms,100ms/230VAC at full load
HOLD UP TIME(typ.)	25ms/230VAC at full load	
PROTEC-TION	SHORT CIRCUIT	Hiccup mode ; recovers automatically after fault condition is removed
	OVERLOAD	Over 110% of rating ; recovers automatically after fault condition is removed
	OVER VOLTAGE	Over 110% of rating ; recovers automatically after fault condition is removed
ISOLA-TION	WITHSTAND VOLTAGE	I/P-O/P:AC3KV
	ISOLATION RESISTANCE	I/P-O/P : DC500V 100Mohms(At room temp. & humid.)
ENVIRON-MENT	WORKING TEMP.&HUMID.	-40~+50°C (Refer to "DERATING CURVE"),20~95%RH
	STORAGE TEMP.&HUMID.	-40~+75°C,10~95%RH
	VIBRATION	10~500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
OTHERS	DIMENSION/WEIGHT	193.4*28.3*19mm(L*W*H)/0.13Kg
NOTE	1. All parameters not specially mentioned are measured at 220vac input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHZ of bandwidth by using a 12" twisted pare-wire terminated with 0.1 uF & 47uF parallel capacitor. 3. Tolerance : includes set up tolrance, line regulation and load regulation. 4. Line regulation is measured from low line to high line at rated load. 5. Load regulation is measured from low 0% to 100% rated load.	


■ BLOCK DIAGRAM

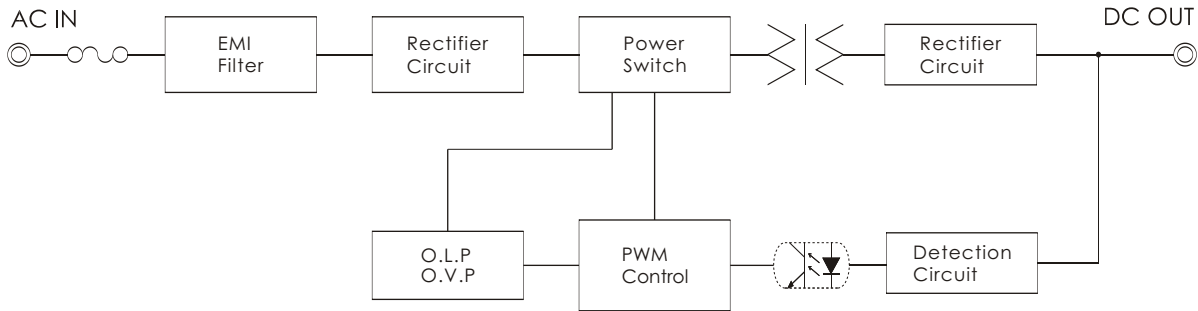

■ DIMENSIONS(unit:mm)

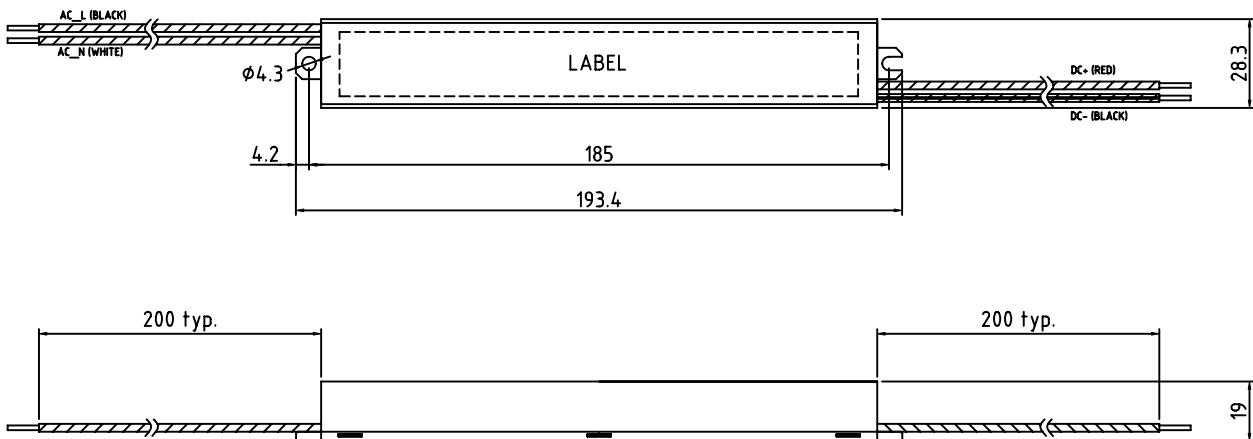

■ DERATING CURVE

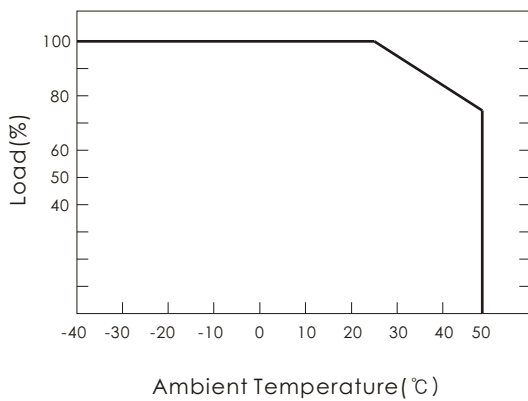

■ STATIC CHARACTERISTICS

